


Thermostat Limiter Bracket Install

The limiter bracket can be installed in two positions depending on the orientation of the selector switch:

Vertical or Horizontal:

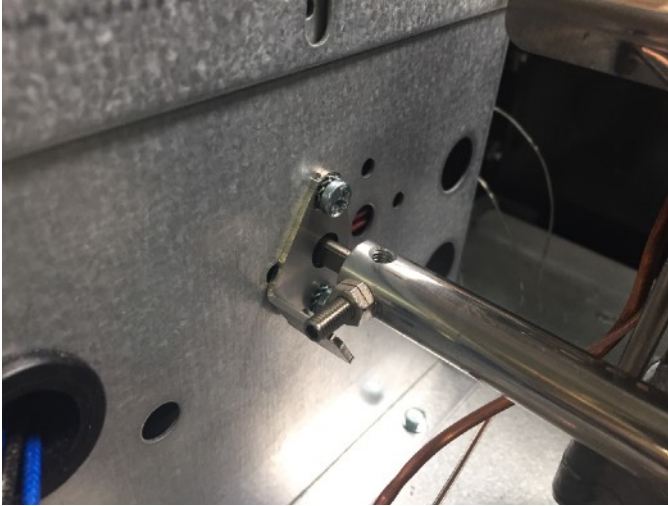

1. Dismount the selector switch and pull the control rod off the D-shaft.
2. You may need to loosen the control panel ([see Control Panel Replacement Doc.](#)) on one side enough to pull the control rod off the selector switch D-shaft.
3. Place the limiter bracket over the selector switch D-shaft oriented the same direction as the selector switch with the limiter tab aimed towards the front of the range.
4. Reuse the two Phillips selector switch mounting screws to mount the bracket.
5. Reinstall the control rod.

Ranges produced before 2014 will need to replace the thin 6mm control rod shaft with a 10mm thick aluminum control shaft to install the full kit.

The 10mm aluminum control rod must be used with the 20mm long M5 Allen set screw and the M5 locking nut to engage the limiting tab.